


## **HoyHome LV Series**

Residential Battery Storage System (Low voltage)

- Minimalist design, practical and elegant
- IP55 Rating, suitable for outdoor and indoor installation
- Supports wifi, bluetooth, remote monitoring, diagnose and upgrade
- Wiring free design, ultra-convenient for installation and capacity expansion
- Self-heating function integrated, suitable for lower temperature operation
- Highly modular design to meet different capacity demands



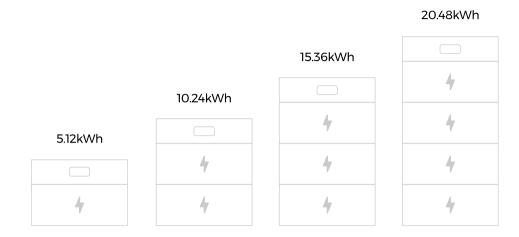

| Model                     | HoyHome-LV05                            | HoyHome-LV10  | HoyHome-LV15   | HoyHome-LV20   |
|---------------------------|---|---------------|----------------|----------------|
| Battery Type              | LFP                                     | LFP           | LFP            | LFP            |
| Configuration             | 1P16S                                   | 2P16S         | 3P16S          | 4P16S          |
| Rated Voltage             | 51.2V                                   | 51.2V         | 51.2V          | 51.2V          |
| Rated Energy              | 5.12kWh                                 | 10.24kWh      | 15.36kWh       | 20.48kWh       |
| Electrical Parameters     |   |               |                |                |
| Voltage Range             | 46.4V~55.2V                             |               |                |                |
| Rated Charging Current    | 50A                                     | 100A          | 150A           | 150A           |
| Max. Charging Current     | 50A                                     | 100A          | 150A           | 150A           |
| Rated Discharging Current | 50A                                     | 100A          | 150A           | 150A           |
| Max. Discharging Current  | 50A                                     | 100A          | 150A           | 150A           |
| Mechanical Parameters     |   |               |                |                |
| Weight                    | 62.5kg                                  | 111.5kg       | 160.5kg        | 209.5kg        |
| Dimensions (W*D*H)        | 665*200*503mm                           | 665*200*771mm | 665*200*1039mm | 665*200*1306mm |
| IP Rating                 | IP55                                    |               |                |                |
| Cooling                   | Natural cooling                         |               |                |                |
| Operating Conditions      |   |               |                |                |
| Ambient Temperature       | Charge:-10°C~50°C, Discharge:-20°C~50°C |               |                |                |
| Operating Humidity        | 10~95%, RH                              |               |                |                |
| Altitude                  | <2000m (derating>2000m)                 |               |                |                |
| Mounting                  | Floor standing                          |               |                |                |
| Cycle Life                | 8000 cycles                             |               |                |                |
| Compliance                | IEC62619/UN38.3                         |               |                |                |
| Warranty                  | 5 years/10 years                        |               |                |                |

HOYPOWER reserves the right to modify the parameters, specifications and features shown herein, without prior notice or obligation.